

TT Pro Pyramid





		The second secon				
	Weight (kg)	Impact Level Low Moderate High			Weight (lb)	
	44-52	1P	2P	3W	100-115	
	53-59	2P	2W	3W	116-130	
	60-68	2P	3W	3B	131-150	
	69-77	2W	3W	3B	151-170	
	78-88	2W	3B	3B	171-195	
	89-100	3B	3B	3B	196-220	
	101-116	3B	3B	0	221-255	
	117-125	3B	3B	-	256-275	
-						

Ç€

Torsion Rods


1 = 1 DOT 406007 2 = 2 DOT 406008 3 = 3 DOT 406009

Springs P = Purple Spring 406014


W = White Spring 406015 B = Black Spring 406016

Once fitted with torsion rod and spring, cover appropriate lines on top housing with permanent black marker to leave appropriate number and letter showing.

















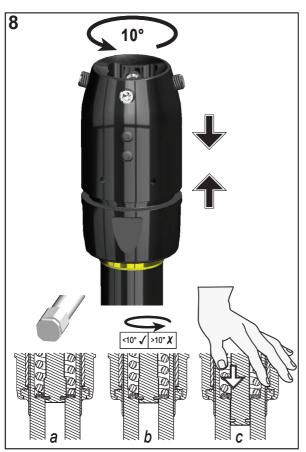





Maintenance:

It is recommended that the following maintenance is carried out annually:

Disassemble, clean and lubricate parts as shown in figures 1-10. Check for rotational free play and replace torsion rod if worn. The wearer must be handed the user information card supplied, and be advised of the following:

Any changes in performance of the device must be reported to the practitioner e.g. unusual noises, looseness or free play. The practitioner must also be informed of any changes in body weight and/or activity level.



Blatchford Products Ltd

Lister Road, Basingstoke, Hampshire, RG22 4AH, United Kingdom Telephone: +44 (0)1256 316600 Facsimile: +44 (0)1256 479705 Email: sales@blatchford.co.uk www.endolite.co.uk

CE